




SXS - 25 DISPENSER-FILTER

197D1071P023

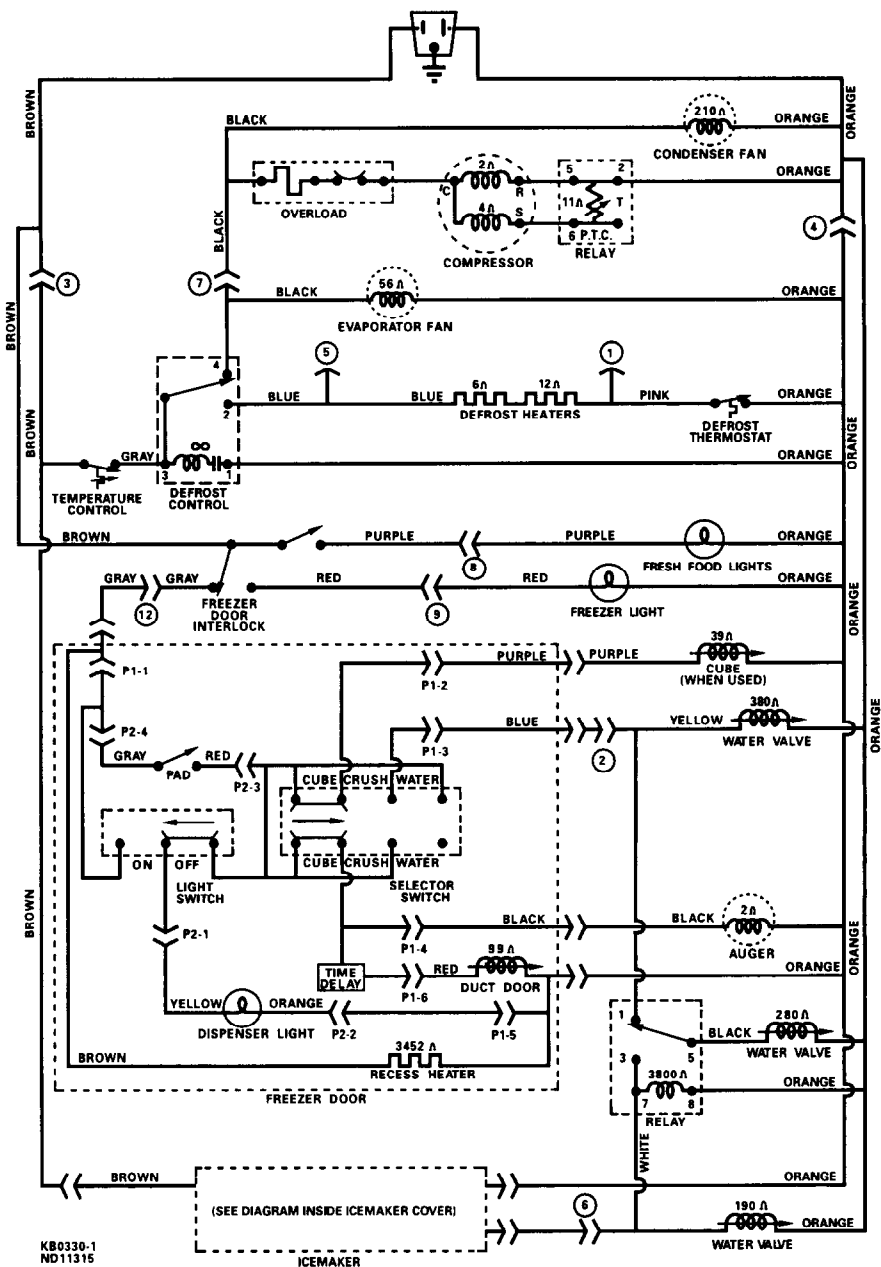


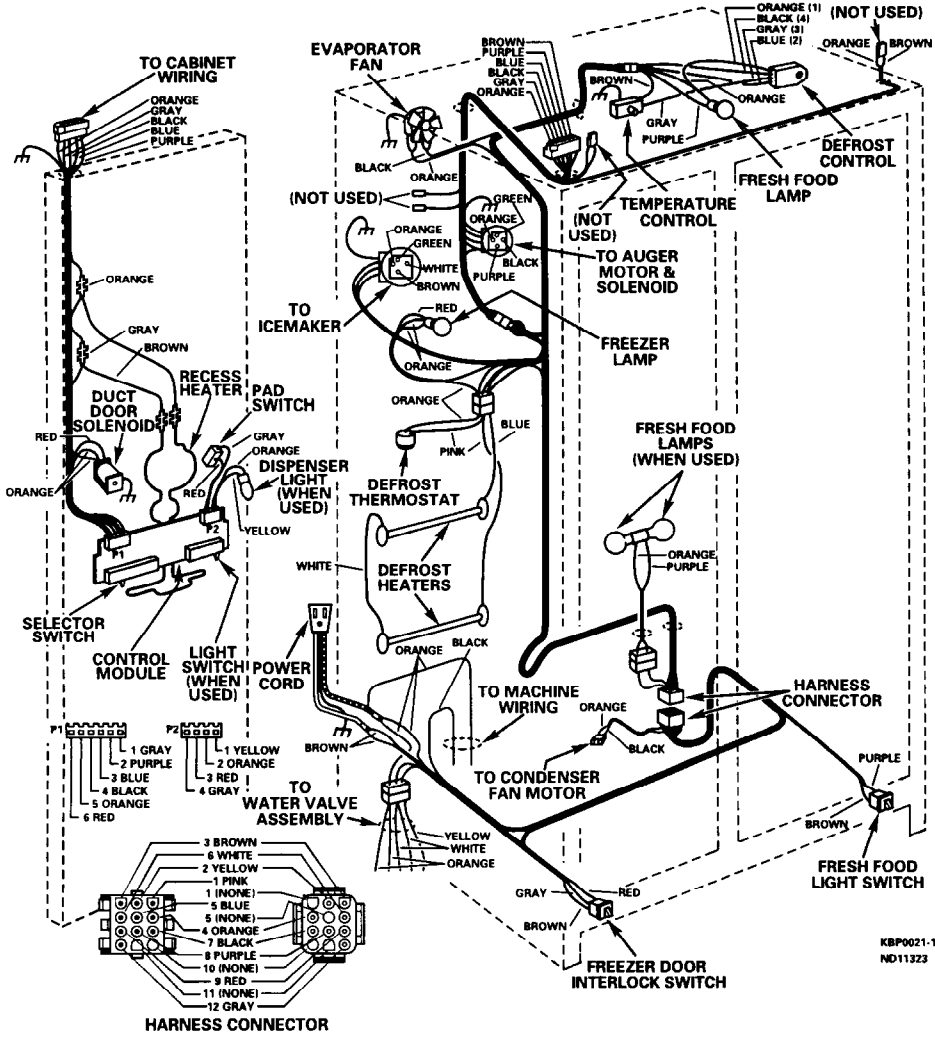

KBP0021-1
 ND11323

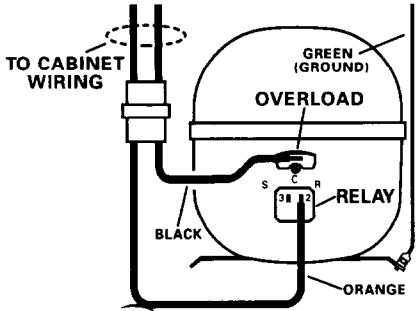

KB5111-1
 ND11312

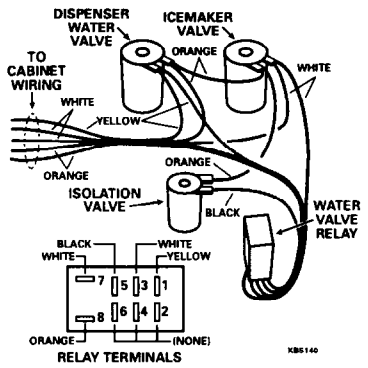

KB5140

DISCONNECT POWER CORD BEFORE SERVICING**IMPORTANT - RECONNECT ALL GROUNDING DEVICES**

All parts of this appliance capable of conducting electrical current are grounded. If grounding wires, screws, straps, clips, nuts or washers used to complete a path to ground are removed for service, they must be returned to their original position and properly fastened.

ELECTRICAL SPECIFICATIONS

Temperature Control (Position 5) 7-(-11)°F
 Defrost Control 16 hrs @ 35 min
 Defrost Thermostat 60-28°F
 Electrical Rating: 115V. AC 60Hz. 11.6 Amp
 Maximum Current Leakage 0.50 mA.
 Maximum Ground Path Resistance 0.14 Ohms
 Energy Consumption 84 KWH/mo.


NO LOAD PERFORMANCE

Control Position **MID/MID**
 and Ambient of:

	70°F	90°F
Fresh Food, °F	32 - 40	33 - 41
Frozen Food, °F	(-4) - 10	(-4) - 4
Run Time, %	<45%	<70%

REFRIGERATION SYSTEM

Refrigerant Charge (R134a) 5¼ ounces
 Compressor 1159 BTU/hr
 Minimum Compressor Capacity 22 inches
 Minimum Equalized Pressure
 @ 70°F 48 PSIG
 @ 90°F 60 PSIG


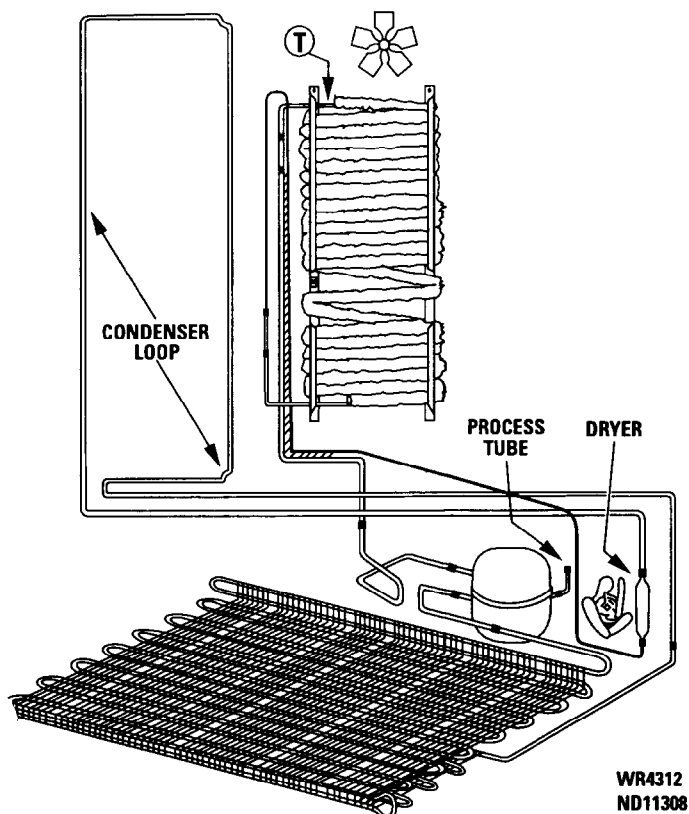
**IMPORTANT SAFETY NOTICE**

This information is intended for use by individuals possessing adequate backgrounds of electrical, electronic and mechanical experience. Any attempt to repair a major appliance may result in personal injury and property damage. The manufacturer or seller cannot be responsible for the interpretation of this information, nor can it assume any liability in connection with its use.

INSTALLATION

Clearance must be provided for air circulation:

AT TOP 1 inch
 AT SIDES 5/8-inch
 AT REAR 1-inch

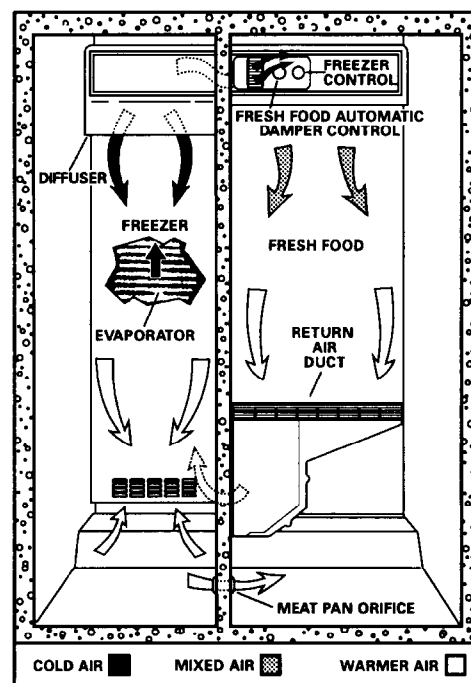AIR FLOW**REPLACEMENT PARTS**

Temperature Control WR09X10016
 Relay WR07X0277
 Overload WR08X10006
 Defrost Control WR09X0489
 Defrost Thermostat WR50X0122
 Defrost Heaters & Harness WR51X0443
 Condenser Fan Motor WR60X10010
 Evaporator Fan Motor WR60X10007